




OSDP Access Control Composite Cable

24/2PR STR OAS CMP LoCap / RS485- Reader
22/4 STR CMP - Contacts
18/4 STR OAS CMP - Rex/Motion
18/4 STR CMP - Lock Power

236700707 (500 ft reel)

236700807 (1,000 ft reel)

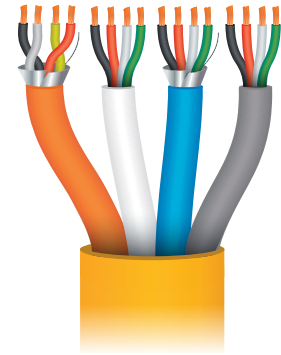

1.0 Scope

1.1 This cable is a composite construction of 4 Plenum rated components that are cabled together with an overall yellow jacket. Component 1 contains (2) low capacitance pairs of 24 AWG stranded copper conductors insulated with color-coded FEP, wrapped with a tinned copper drain wire and overall Aluminum-Polyester foil shield, with an orange jacket. Component 2 contains (4) 22 AWG stranded copper conductors insulated with color-coded low smoke copolymer, with a white jacket. Component 3 contains (4) 18 AWG stranded copper conductors insulated with color-coded low smoke copolymer, wrapped with a tinned copper drain wire and overall Aluminum-Polyester foil shield, with a blue jacket. Component 4 contains (4) 18 AWG stranded copper conductors insulated with color-coded low smoke copolymer, with a gray jacket.

2.0 Construction

2.1 Component 1 - Reader Cable

2.1.1 Conductor

- 2.1.1.1 Material: Stranded Bare Copper
- 2.1.1.2 Size: 24 AWG Stranded (7 Strand)
- 2.1.1.3 # Conductors: 4 (2 Pair)

2.1.2 Insulation

- 2.1.2.1 Material: Foam FEP
- 2.1.2.2 Wall Thickness: 0.016"
- 2.1.2.2 Color Code: White/Black, Yellow/Red
- 2.1.2.3 Shield: Aluminum Mylar
- 2.1.2.2 Shield Coverage: 100%

2.1.3 Drain Wire:

- 2.1.3.1 Material: Tinned Copper - 24 AWG
- 2.1.3.2 Construction: Stranded (7 strand)

2.1.4 Jacket

2.1.4.1 Material: Low Smoke Copolymer

2.1.4.2 Wall Thickness: 0.15"

2.1.4.3 OD: .184" nom

2.1.4.4 Color: Orange

2.1.5 Electrical Properties

2.1.5.1 Capacitance CDR-CDR: 12.5 pF/ft

2.1.5.2 DC Resistance: 26.2 Ohms/M'

2.2 Component 2 - Contacts

2.2.1 Conductor

- 2.2.1.1 Material: Stranded Bare Copper
- 2.2.1.2 Size: 22 AWG Stranded (7 Strand)
- 2.2.1.3 # Conductors: 4

2.2.2 Insulation

- 2.2.2.1 Material: Low Smoke Copolymer
- 2.2.2.2 Wall Thickness: 0.007"
- 2.2.2.2 Color Code: Black, Red, White, Green.

2.2.3 Jacket

- 2.2.3.1 Material: Low Smoke Copolymer
- 2.2.3.2 Wall Thickness: 0.15"
- 2.2.3.3 OD: .133" nom
- 2.2.3.4 Color: White

2.2.4 Electrical Properties

- 2.2.4.1 Capacitance CDR-CDR: 32 pF/ft
- 2.2.4.2 DC Resistance: 16.4 Ohms/M'

2.3 Component 3 - REX / Motion

2.3.1 Conductor

- 2.3.1.1 Material: Stranded Bare Copper
- 2.3.1.2 Size: 18 AWG Stranded (7 Strand)
- 2.3.1.3 # Conductors: 4

2.3.2 Insulation

- 2.3.2.1 Material: Low Smoke Copolymer

The information and specifications described herein are subject to error or omission and to change without notice.

Paige provides the information and specifications herein on an "AS IS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Paige be liable for any damages (including consequential, indirect, incidental, special, punitive or exemplary damages) whatsoever, even if Paige has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein.



- 2.3.2.2 Wall Thickness: 0.009"
- 2.3.2.3 Color Code: Black, Red, White, Green
- 2.3.2.4 Shield: Aluminum Mylar
- 2.3.2.5 Shield Coverage: 100%

2.3.3 Drain Wire:

- 2.1.3.1 Material: Tinned Copper - 24 AWG
- 2.1.3.2 Construction: Stranded (7 strand)

2.4.3 Jacket

- 2.4.3.1 Material: Low Smoke Copolymer
- 2.4.3.2 Wall Thickness: 0.15"
- 2.4.3.3 OD: .188"
- 2.4.3.4 Color: Blue

2.3.4 Electrical Properties

- 2.3.4.1 Capacitance CDR-CDR: 65 pF/ft.
- 2.3.4.2 DC Resistance: 6.5 Ohms/M'

2.4 Component 4 - Lock Power (or Aux)

2.4.1 Conductor

- 2.4.1.1 Material: Stranded Bare Copper
- 2.4.1.2 Size: 18 AWG Stranded (7 Strand)
- 2.4.1.3 # Conductors: 4

2.4.2 Insulation

- 2.4.2.1 Material: Low Smoke Copolymer
- 2.4.2.2 Wall Thickness: 0.009"
- 2.4.2.3 Color Code: Black, White, Red, Green

2.4.3 Jacket

- 2.4.3.1 Material: Low Smoke Copolymer
- 2.4.3.2 Wall Thickness: 0.15"
- 2.4.3.3 OD: .183"
- 2.4.3.4 Color: Gray

2.4.4 Electrical Properties

- 2.4.4.1 Capacitance CDR-CDR: 35 pF/ft.
- 2.4.4.2 DC Resistance: 6.5 Ohms/M'

2.5 Overall Jacket:

- 2.5.1 Material: Low Smoke Copolymer
- 2.5.2 Wall Thickness: .020"
- 2.5.3 OD: .420" nom
- 2.5.4 Color: Yellow

2.6 Temperature Rating

- 2.6.1 -4°C to 75°C

2.7 Weights and Dimensions

- 2.7.1 Weight: 125 LBS/1000'
- 2.7.2 Package: 500' Reel or 1,000' Reel

3.0 Component Markings

3.1 Component 1 (Reader):

PAIGE OSDP READER CABLE E191596 24/2PR SHIELDED 75C (UL) CL3P OR C(UL)US CMP FT6 ROHS COMPLIANT MADE IN USA

3.2 Component 2 (Contacts):

PAIGE CONTACTS E191596 22/4C 75C (UL) CL3P OR C(UL)US CMP FT6 ROHS COMPLIANT MADE IN USA

3.3 Component 3 (REX / Power):

PAIGE REX/POWER E191596 18/4C SHIELDED 75C (UL) CL3P OR C(UL) US CMP FT6 ROHS COMPLIANT MADE IN USA

3.4 Component 4 (Lock Power or Aux):

PAIGE LOCK POWER E191596 18/4C 75C (UL) CL3P OR C(UL)US CMP FT6 ROHS COMPLIANT MADE IN USA

3.5 Overall Jacket:

PAIGE OSDP ACCESS CONTROL CABLE E191596 75C (UL) CL3P OR C(UL)US CMP FT6 ROHS COMPLIANT MADE IN USA ASCENDING / DESCENDING FOOT MARKINGS

Compliance:

- Cable suitable for installation under NEC (NFPA 70) articles 805, 725 and 760 guidelines
- Cable suitable for installation in Canada under Section 60 of CEC, Part1
- C(UL) listed as CMP per UL standard 444 and per CSA C22.2 No. 214-17
- UL Listed as CL3P per UL standard 13 or FPLP per UL standard 1424
- Cable meets NFPA 262 (Steiner tunnel) flame test
- Cable meets RoHS 2002/95/EC Directive, RoHS 2011/65/EU Directive, RoHS 3 2015/863/EU Directive
- Cable is REACH compliant per Regulation (EC) No 1907/2006 Updated June 27, 2018
- Made in the USA

We want to hear from you!
200 Sheffield St, Suite 302, Mountainside, NJ 07092

Tel: 888.423.8947 cgorders@paigeconnected.com
www.paigedatacom.com

